

RUTSCHWINKELPRÜFGERÄT, MESSUNG DES REIBUNGSKOEFFIZIENTEN

Der Haftreibungstester wird zur Messung der Reibungskoeffizienten verwendet.

Der Reibungstester nach TAPPI bestimmt den Haftreibungskoeffizienten von Papierbögen. Sie besteht aus einer neigbaren Plattform, einem Motor, einem Getriebe und einem Gleitgewicht. Die Plattform ist mit einer Schnellspannvorrichtung ausgestattet. Der Block, der zum Klemmen der Probe dient, ist in verschiedenen Größen und Gewichten erhältlich. Die Neigungsgeschwindigkeit ist über ein Potentiometer einstellbar. Ein Kontaktsensor misst den Moment, an dem der Block zu rutschen beginnt. Der Motor wird automatisch abgeschaltet, und die Vorrichtung stoppt den Test.



Testbeschreibung:

EIGENSCHAFTEN

- CE Kennzeichnung

TECHNISCHE DATEN

Stromanschluss	230 V / 50 Hz
Druckluftanschluss	nein
PC-Anschluss	Kein PC-Anschluss
Breite / Durchmesser	0,35 m
Tiefe	0,22 m
Höhe	0,23 m
Gewicht (netto)	12 kg

NORMEN

NFQ 03.083
 TAPPI T503
 TAPPI T549
 ASTM D202
 TAPPI T815

rycobel group, Verkaufsbüro Deutschland



Tel.: +49 (0)9842 - 9 36 96 30 · Fax: +49 (0)9842 - 9 36 96 33 · info@rycobel.de
 ib-walther · Willy-Brand-Straße 4 · D-97215 Uffenheim · www.rycobel.de

RYCOLAB




The static friction tester is used to measure the static coefficient of friction.

Applicable standards

NFQ03.083 / TAPPI T503, T815, T549 / ASTM D202

Description

The friction tester according to TAPPI determines the static friction coefficient of paper sheets. It consists of an inclinable platform, motor, gear and slip weight. The platform is provided with a quick clamp device. The block, which serves to clamp the sample, is available in various sizes and weights. The inclination velocity is adjustable by means of a potentiometer. A contact sensor measures the moment, when the block begins to slip. The motor is turned off automatically, and the device stops the test.

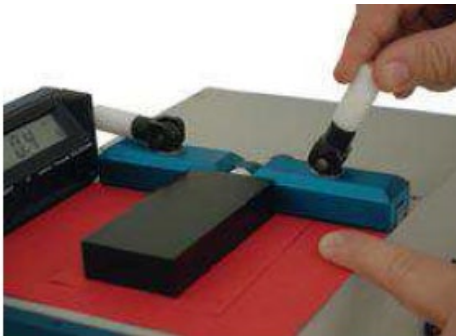

Quick clamping

Test description

The sample is clamped in the sample holder of the platform. Another sample is attached to the block and is placed at the right stop of the platform. After turning on the device, the platform begins to incline according to the preset angle speed. Depending on the sample properties, the device recognizes the angle at which the block begins to slip and indicates the value. The device turns off automatically when the slip of the block is detected.



Moveable platform with block



Finished test

OPTION

According to common standards several blocks are available :

- Block A : 2.0 x 4.0" - 750 g - 14.50 g/cm² (standard)
- Block B : 3.5 x 4.0" - 1260 g - 14.00 g/cm²
- Block C : 1.5 x 3.5" - 500 g - 14.76 g/cm²
- Block D : 2.5 x 2.5" - 200 g - 4.96 g/cm²
- Block E : special size according to customer's requirement

Connections

Electricity : 230 V, 50 Hz

WEIGHT AND DIMENSIONS (ONLY MACHINE)

350 x 220 x 230 mm (WxLxH) / 12 Kg

WEIGHT AND DIMENSIONS (WITH TRANSPORTATION BOX)

400 x 400 x 400 mm (WxLxH) / 15 Kg